


Stock Pot Stove




SPO-2A-GCE

Stock Pot Stove are suited to use for all kitchens of western, chinese restaurants and canteens. Stainless steel exterior body with powerful burner, individual safety valve, pilot light and control valve, ensure efficiency and easy operation.

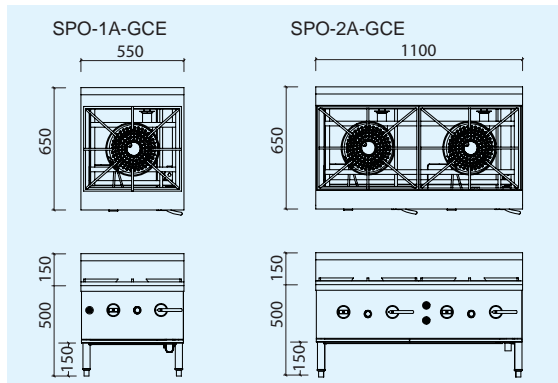

TH Burner with iron grate

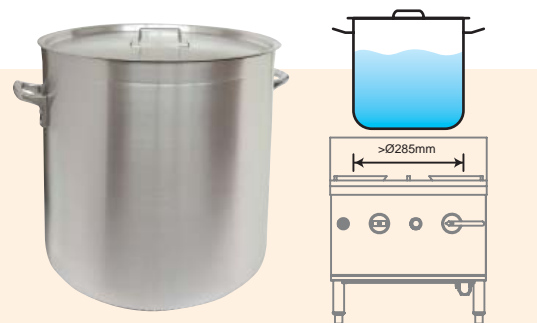

Stock pot stove best performance hints:

For safety and high efficiency, ensure using the right size of stock pot (bottom size not less than Ø285mm).

Specifications of Stock Pot Stove			
CE		Single Burner	Double Burners
Model		SPO-1A-GCE	SPO-2A-GCE
Dimensions (mm)			
Width x Depth x Height		550 x 650 x (500+150)	1100 x 650 x (500+150)
Operating Pressure (mbar) / Heat input kW (BTU / hr.)			
G110 (Town Gas)			
I1a	8mbar	15.5 (52888)	31 (105776)
G30 Butane / G31 Propane (L.P. Gas)			
I3+(28-30/37)	28-30 / 37mbar	12 (40945)	24 (81891)
I3B/P(30)	30mbar	12 (40945)	24 (81891)
I3B/P(37)	37mbar	13.5 (46063)	27 (92127)
I3B/P(50)	50mbar	16 (54594)	32 (109188)
G20 & G25 (Natural Gas)			
I2E ; I2E+ ; I2H	20mbar	12.5 (42651)	25 (85303)
I2L	25mbar		
Fuel Pipe Connection (mm)			
Town Gas		Ø25	Ø25
Butane / Propane (L.P. Gas)		Ø25	Ø25
Natural Gas		Ø25	Ø25
Net / Gross Wt. (kgs)		45 / 83	80 / 133

Remark: Fuel suit for: Town Gas, Natural Gas, Butane/Propane (L.P. Gas). (must specify gas type before ordering).