

強力溝風小炒爐 Compact Wok Range (Air Blast Type)


強力溝風小炒爐適合各類形食肆，由亞洲風味以至西式小炒餐及高尚住宅均適用。其低噪音強力溝風爐頭提供強大火力，確保所有食物在烹調後均色、香、味全。

全不銹鋼外殼並採用組合式設計，配以強力精巧溝風爐頭及高質鑄造耐火磚隔熱，確保安全及清潔衛生。為配合用戶環境要求，設有不銹鋼陳列櫃身型號以合適陳列示範廚房及高尚住宅廚房使用，備有各種顏色可供選擇。另配上歐洲座檯精緻水龍頭，更凸顯此爐具與別不同之處。

Air Blast Compact Wok Range is a versatile partner to meet fast cooking from Asian cooking to Western stir-fry cooking. Powerful air blast burner with tornado type flame can provide great heat to cook delicious food and keep their freshness.

Smart modular design with exterior stainless steel body construction finished with firebrick insulation and air blast compact burner to ensure efficient operation and hygiene. Display stainless steel cabinet base model is designed to adopt the requirement from display kitchen to back of house cooking.

With the optional Europe made swivel faucet on pedestal post to cabinet base model, it will fully show the elegance of this wok range in your prestige kitchen.

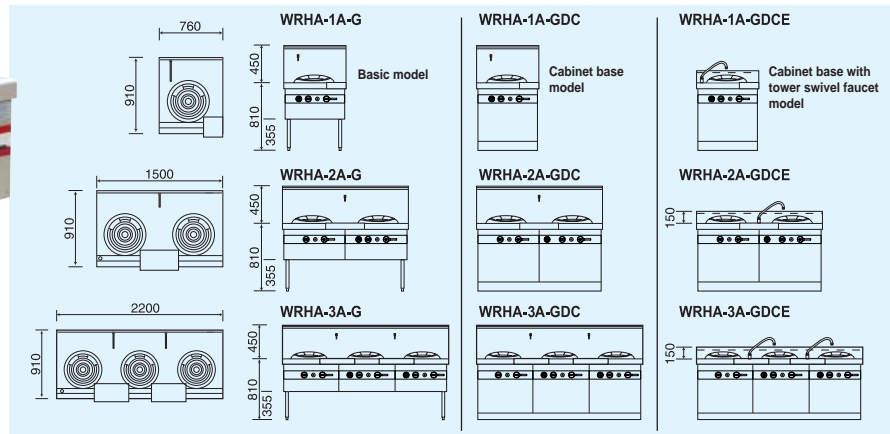

強力溝風小炒爐 (系列A) 規格 Specification of Air Blast Compact Wok Range (Series A)

		單爐頭 Single Head	雙爐頭 Double Heads	三爐頭 Three Heads
G 型號	G-type model No.	WRHA-1A-G	WRHA-2A-G	WRHA-3A-G
GDC 型號	GDC-type model No.	WRHA-1A-GDC	WRHA-2A-GDC	WRHA-3A-GDC
GDCE 型號	GDCE-type model No.	WRHA-1A-GDCE	WRHA-2A-GDCE	WRHA-3A-GDCE
尺寸 (毫米)	Dimensions (mm)	760 x 910 x (810+Back)	1500 x 910 x (810+Back)	2200 x 910 x (810+Back)
風機	Air blower	ME1	2 x ME1	3 x ME1
電壓	Loading (kW)	0.03	2 x 0.03	3 x 0.03
耗電量 (千瓦)	Voltage (V/Ph/Hz)	220/1/50~60	220/1/50~60	220/1/50~60
熱輸入量 (英熱單位 / 小時) / 操作氣壓 (水柱毫米)	Heat input kW (BTU / hr.) / Operating Pressure (mm in water column)	38 (129694) / 100	76 (259388) / 100	114 (389082) / 100
煤氣	Town Gas	40 (136520) / 280	80 (273040) / 280	120 (409500) / 280
石油氣	L.P. Gas	35 (119455) / 200	70 (238910) / 200	105 (358365) / 200
天然氣	Natural Gas			
燃料駁口 (毫米)	Fuel pipe connection (mm)	煤氣 Town Gas: Ø25 石油氣 L.P. Gas: Ø25 天然氣 Natural Gas: Ø25	Ø38 Ø38 Ø38	Ø38 Ø38 Ø38
來水 / 去水	Water inlet / Drainage pipe (mm)	來水 / 去水 Water inlet / Drain: Ø15 / Ø38	Ø15 / Ø38	Ø15 / Ø38
淨重 / 毛重 (公斤)	Net / Gross Wt. (kgs)	G 型號: 140 / 215 GDC 型號: 160 / 235 GDCE 型號: 155 / 230	240 / 340 275 / 375 270 / 370	360 / 485 405 / 530 400 / 525

強力溝風小炒爐 (系列B) 規格 Specification of Air Blast Compact Wok Range (Series B)

		單爐頭 Single Head	雙爐頭 Double Heads	三爐頭 Three Heads
G 型號	G-type model No.	WRHA-1B-G	WRHA-2B-G	WRHA-3B-G
GDC 型號	GDC-type model No.	WRHA-1B-GDC	WRHA-2B-GDC	WRHA-3B-GDC
GDCE 型號	GDCE-type model No.	WRHA-1B-GDCE	WRHA-2B-GDCE	WRHA-3B-GDCE

系列B配備電子點火裝置及熄火安全監控裝置(當鼓風機或火種突然失效，主火力將在3至5秒內停止運作，以確保操作安全)，其他基本結構及尺寸與系列A之相同型號一樣。

Series B equipped with Electronic Ignition Device & Flame Failure Supervision Device (ensures safety operation. The main flame will be cut off in 3 sec. if pilot light goes off & in 5 sec. if Air Blower fails). All other basic constructions & dimensions are equivalent to the corresponding models of Series A.

Ø75mm 強力溝風爐頭
Ø75mm Air blast burner assembly



陳列櫃身連座檯歐洲塔式搖擺水龍頭
European Tower Type Swivel Faucet for Display Cabinet Base for GDCE series.

備註	
G 型號	標準型號
GDC 型號	不銹鋼陳列櫃身
GDCE 型號	不銹鋼陳列櫃身連座檯塔式搖擺水龍頭
標準部件及配件:	<ul style="list-style-type: none"> 熄火安全掣 (系列A) 電子點火裝置 (系列B) 熄火安全監控裝置 (系列B) 調味板 鼓風機
另選配件:	<ul style="list-style-type: none"> 炸芥架 水盆 鑊枕 鑊座 鑊碼

此產品適合: 煤氣, 石油氣, 天然氣使用 (採購前必須列明氣體種類)

Remark	
G-type model	Standard Model
GDC-type model	Display Cabinet Base
GDCE-type model	Display Cabinet Base with European Tower Type Swivel Faucet
Standard Components & Accessories:	<ul style="list-style-type: none"> Flame Failure Device (Series A) Electronic Ignition Device (Series B) Flame Failure Supervision Device (Series B) Condiment Board Air Blower
Optional Accessories:	<ul style="list-style-type: none"> Sieve Holder Water Pan Wok Supporter Wok Stand Wok Range Clip
Fuel suit for:	Town Gas, Natural Gas, L.P. Gas (must specify gas type before ordering).